

EASY JOINTING SAND



Hard, elastic joint



Frost resistant



Inhibits weeds




Permeable



For lighter traffic

Ideal jointing material for patios, walkways and driveways where you want a flexible, bonded joint with a minimum of weeds.

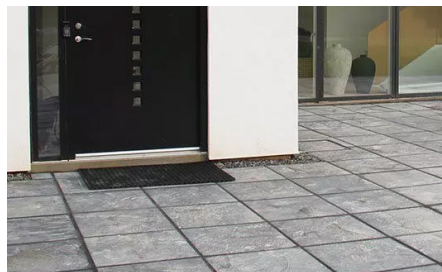

LITHOMEX

- binds every stone together

Technical data

Solid joint

Polymer bonded
jointing sand.
Density : 1.51 g/cm³

Applications

Patios, Walkways
and Driveways

Colours



Functionality

A permeable solid joint
that is flexible. Binder
activates with water
to form a weed-
resistant joint.

Jointing

Jointing with EASY must
be done in dry weather
and between 5°C and 25°C.
Be aware of night,
soil and material
temperatures.

Shelf life

Up to 2 years when stored
dry in unopened
packaging.

Joint width

From 1-10 mm

Joint depth

Joint depth for EASY
Jointing sand has to be
equal to the stone height,
but atleast 30 mm.

Hardening

The hardening time
for the material is
1-3 days depending
on temperature and
base build-up.

Consumption guide 50 mm joint depth

Size of the stone surface

21 x 14 cm
30 x 30 cm
40 x 40 cm
60 x 60 cm

Joint width 2 mm

1.80 kg/m²
1.01 kg/m²
0.76 kg/m²
0.50 kg/m²

Joint width 6 mm

5.39 kg/m²
3.02 kg/m²
2.27 kg/m²
1.51 kg/m²

Joint width 10 mm

8.99 kg/m²
5.03 kg/m²
3.78 kg/m²
2.52 kg/m²

How-to guide

BEFORE JOINTING



Always start with a small area to see how the pavement responds to the joint.

The floor structure **MUST** be permeable and dimensioned for the desired use according to current standards.

The surface should have a minimum slope of 1% to allow water to drain away.

When renovating the pavement, it must be completely free of weeds and remnants of old sealant. Make sure the surface is dry and swept clean.

Joint depth for EASY Jointing sand has to be equal to the stone height, but at least 30 mm.

Make sure you have plenty of time to finish the area the same day so that dew and rain don't inadvertently activate the binder.

Only use EASY at temperatures above 5°C.

Pay attention to night and soil temperature.



SHAKE the bag well to get an even mixture. (mix in a bucket if you prefer).

Sweep EASY Jointing sand diagonally into the joints with a soft broom until they are filled.

Compress the joints, e.g. with a vibratory plate. Backfill the joints to a few mm from the top edge of the stone. For stones with bevelled edges, fill only to the bottom edge of the bevel. Sweep the surface clean with a soft broom. To avoid blurring the stones, blow the dust off the stones, e.g. with a leaf blower.

Activate the binder by watering the pavement. Water in the downward direction with shower function. Water until the joint is FULLY soaked. Finish smaller areas at a time.



DURING JOINTING



If the jointing sand is not compacted in the joint and sufficiently soaked, the desired strength and weed inhibiting effect will not be achieved.

How-to guide

AFTER JOINTING



Failure to clean the pavement before watering can result in mortar residue or staining on the surface. Should the unfortunate happen, it can be removed with water and a stiff brush.

The pavement can be walked on when the surface is dry and can withstand light traffic after approx. 3 days (in dry weather, approx. 20°C and with average bottom build-up). Lower temperatures extend the hardening time.

To maintain difficult conditions for weeds, the joints must always be filled. Repairs are easily made, remove any remaining jointing material where the repair is to be made and install EASY in the normal way.



Watch the video guide for EASY Jointing sand



Try our joint material calculator



Find inspiration in our FAQ



LITHOMEX

- binds every stone together

Please contact us for counselling during our opening hours



Lervejldal 14D • Addit • DK-8740 Brædstrup
Phone: +45 8622 1122 • info@lithomex.com • VAT no.: 37 39 48 74
www.lithomex.com